

# MARION COUNTY SURVEYOR'S OFFICE


## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 8 TWN. 15<sub>N</sub> RNG. 4<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 10-13-09  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: Harrison  
Method of Establishment: County: 11/30/1999  
IN S.P.C. E Zone, NAD 83  
Name: 15040804  
N: 500 944.246 0(m)  
E: 61 048.430 0(m)

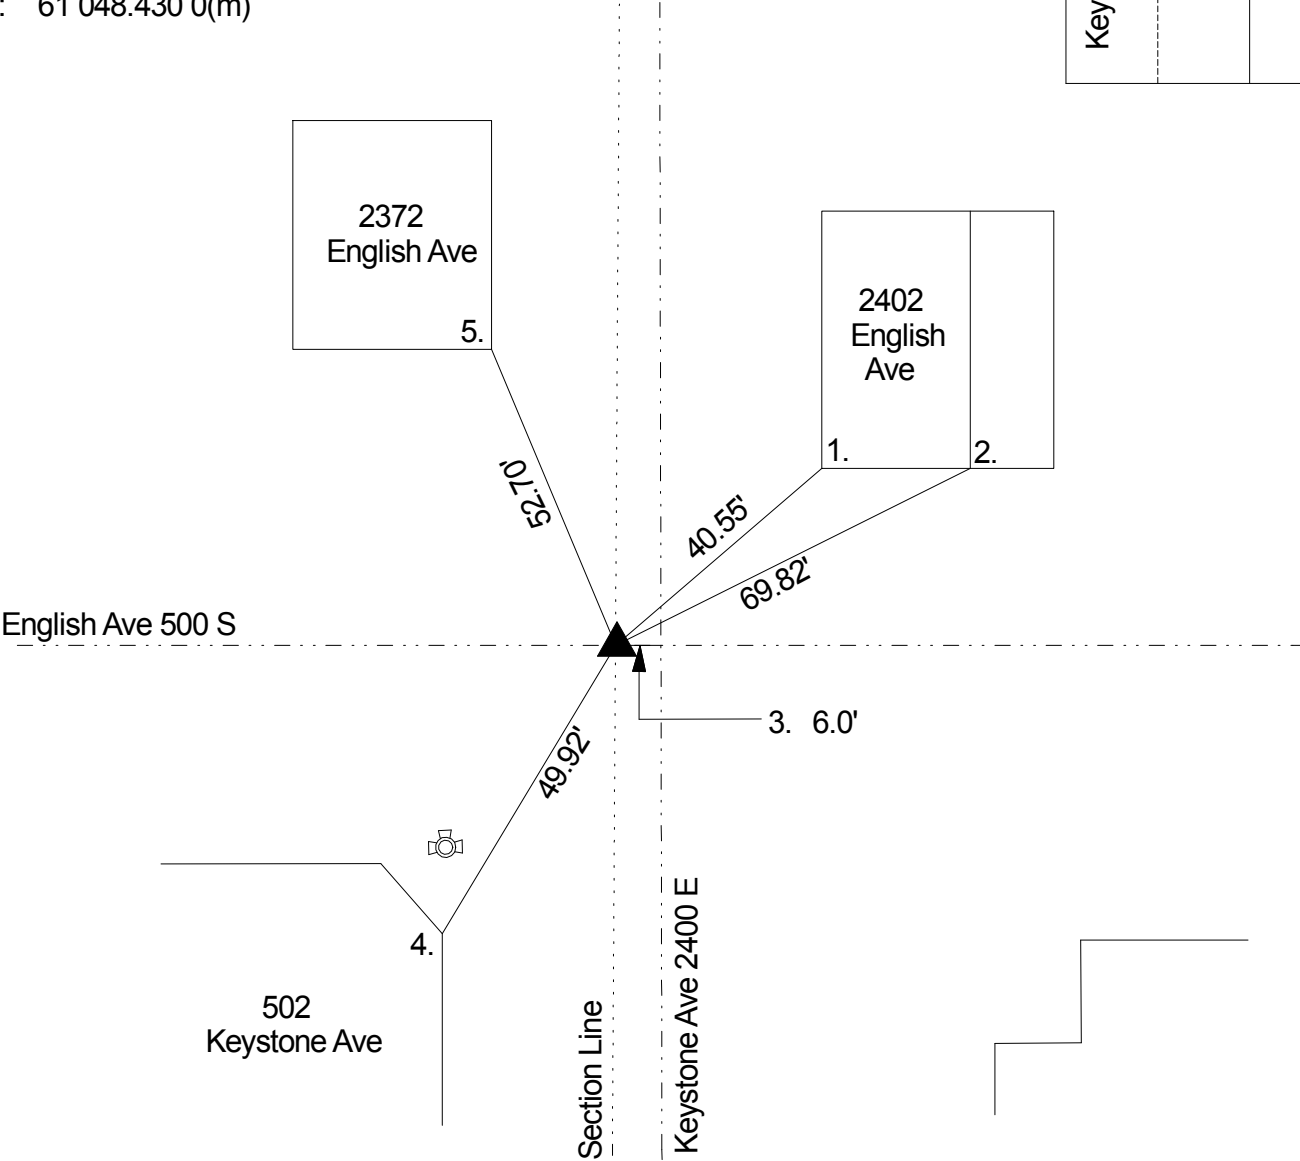

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 15" Beech bearing N 46 E 5 links; and a 7" dogwood bearing S 61 W 13 links (Marion County Atlas p. 10). A survey by H.B. Fatout on 3/3/1880 indicates no stone or witnesses (Center Legal Book p.26). Corner referenced by Howe on 12/6/1974 and called a PK nail. Corner referenced by Greene on 8/28/88 and called a PK nail. Corner referenced by Kiste on 10/19/94 and called the same. Corner referenced by Wilcoxen on 11/30/1999 and called the same. Corner referenced by Whiteside on 8/22/2001 and called the same. Corner excavated by Wilcoxen on 10/2/01 and a #205 cast iron Harrison monument was set per ties. Retied 10/13/09 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	40.55'	SW corner of 2402 English 6" up
2.	69.82'	SE corner of brick 2402 English Ave
3.	6.0'	Due E to centerline of Keystone
4.	49.92'	SE corner of brick of 45° entrance to 502 Keystone
5.	52.70'	SE corner of 2372 English (alum. siding)